

# IRRIGATION, GROUNDWATER, DRAINAGE AND SOIL SALINITY CONTROL IN THE ALLUVIAL FAN OF GARMSAR, IRAN

Consultancy assignment to the Food and Agriculture Organization (FAO) of the  
United Nations, February 2000

R.J. Oosterbaan

International Institute for Land Reclamation and Improvement (ILRI)

Wageningen, The Netherlands

On website [www.waterlog.info](http://www.waterlog.info) , public domain.

## Table of contents

1. Characteristics of the project area.....	2
Situation .....	2
Climate.....	2
Geo-morphology.....	2
Soils.....	2
Water resources.....	4
Water quality.....	5
Irrigation/drainage.....	6
Cropping patterns.....	6
Distribution of irrigation water.....	8
Water balances.....	8
Soil Salinity.....	11
Hydraulic conductivity.....	14
Land drainage systems.....	15
(To be completed)	
Additional irrigation from deep wells.....	15
(To be completed)	
2. Recommendations.....	15
(To be completed)	

## IRRIGATION, GROUNDWATER, DRAINAGE AND SOIL SALINITY CONTROL IN THE ALLUVIAL FAN OF GARMSAR, IRAN

### 1. Characteristics of the project area

#### Situation

The Garmsar project is located approximately 120 km southeast of Tehran, at the southern fringe of the Alburz mountain range, where the Hableh Rud River emerges and where the Dasht-e-Kavir desert begins (Figure 1). The elevation of the area ranges between 800 to 900 m above sea level.

#### Climate

The climate of the Garmsar area is continental arid. The rainfall and humidity are low. The average annual rainfall is 120 mm and occurs mainly from January to March.

The summers are hot, the winters cold. The monthly average temperature ranges from 4<sup>0</sup>C in January with a minimum of -10<sup>0</sup>C, to 32<sup>0</sup>C in July with a maximum of 42<sup>0</sup>C.

The potential evaporation is high. The class-A pan evaporation has an annual value of 3200 mm. The monthly values range from 50 mm in January to 500 mm in July.

Wind speeds are modest. The average annual wind velocity is 11 km/hr. The maximum velocity is 40 km/hr. The windiest month is April, with an average velocity of 15 km/hr.

#### Geo-morphology

The Garmsar project area is situated on an alluvial fan, a body of cone-shaped sediments built up by the Hableh Rud at the mountain front (Figure 2).

The apex of the fan at BoneKuh is at an elevation of 990 m above sea level. The radius of the fan is some 20 km.

At the head of the fan, the slope of the land is about 1:70. This gradient decreases to 1:200 at the base of the fan

At the apex, the river diverges into numerous branches radiating out over the fan.

The upper part of the fan consists of coarse and stony colluvial deposits. In the middle and lower parts, the coarse deposits are overlain by fine clayey sediments.

The base of the fan is a seepage zone where groundwater approaches the soil surface. The evaporation from the shallow water table is the cause of the salts in the Kavir desert.

#### Soils

The soils are classified as follows:

1. – Shallow gravely soils in the highest part of the fan
2. – Moderately coarse to medium textured soils in the upper and middle parts
3. – Medium to fine textured soils in the middle and lower parts



Figure 1. The alluvial fan of Garmsar from space

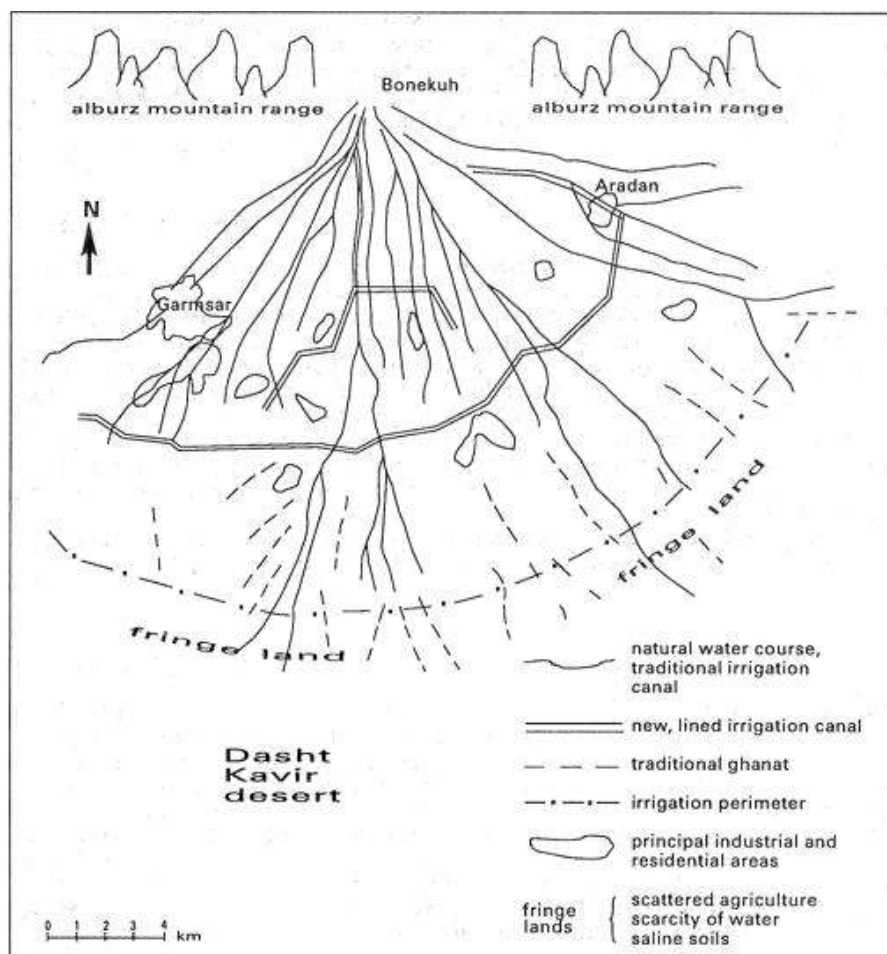


Figure 2. Sketch of the alluvial fan of Garmsar

The majority of the soils is suitable for irrigated agriculture.

The fine textured soils at the base of the fan are at many places slightly to moderately saline due to the emergence and evaporation of groundwater whereby the soils remain behind in the soil.

The soils are only slightly alkaline,  $\text{pH} < 8.5$ .

The hydraulic conductivity of the alluvial fan deposits and of the unconfined part of the aquifer is high: at least 10 m/day. The hydraulic conductivity of the finer textured topsoil at the base of the fan is less but not negligible: 0.5 to 1.0 m/day.

Given the aquifer properties (see below) the soil's impermeable layers are at great depth ( $> 10$  m).

Many of the soils are rich in calcium and contain up to 30% of lime. The gypsum content is not exactly known, but it is much less.

### **Water resources**

The Hableh Rud River is the main source of water. However, its supply is not dependable as the annual discharge varies fourfold (between 4 and 16  $\text{m}^3/\text{s}$  on average). The annual mean discharge is 8.72  $\text{m}^3/\text{s}$  or some 530  $\times 10^6 \text{ m}^3/\text{year}$ . The highest monthly discharge occurs in March with on average 40  $\times 10^6 \text{ m}^3$ , ranging widely from 10  $\times 10^6$  to 100  $\times 10^6 \text{ m}^3$ . The lowest discharge occurs in October with on average 14  $\times 10^6 \text{ m}^3$ , ranging from 9  $\times 10^6$  to 19  $\times 10^6 \text{ m}^3$ .

The many river branches and the irrigated fields provide recharge to the aquifer. Since ancient times, groundwater in the Garmsar area has been exploited by ghanats (qanats, karezes) and shallow wells, mainly for irrigation of agricultural land, but also for household purposes. In the last decades, the number of deep-wells has increased sharply and the ghanats have fallen dry. The safe yield of the aquifer, whereby the water-table does not unduly drop, is unknown.

### **Geo-hydrology**

The thickness of the aquifer, i.e. the depth of the impervious bedrock, varies from 250 m near the apex of the alluvial fan to 100 m in the lower parts (Figure 3).

The hydraulic transmissivity of the aquifer (i.e. the product of hydraulic conductivity in m/day and the thickness in m), found through pumping test from wells, is high. It varies from 4000  $\text{m}^2/\text{day}$  in the upper part to 500  $\text{m}^2/\text{day}$  in the lower part.

The aquifer is unconfined in the upper part. It is not known whether, at the lower part, semi-confined conditions (i.e. the permeable aquifer is overlain by a slowly permeable layer so that overpressures in the aquifer develop) exist, but it is quite certain that purely confined, artesian, aquifers are absent.

The slope of the groundwater table in the upper part is quite flat and varies from 1:1400 in dry years (i.e. when the Hableh Rud brings relatively much water) to 1:700 in dry years (when the Hableh Rud brings relatively little water). Hence, the groundwater flow in dry years is half the flow in wet years. In wet years the water-table rises due to a high recharge, while in dry years it drops 20 m or more. In the lower part of the fan the slope is steeper and ranges from 1:100 to 1:400.

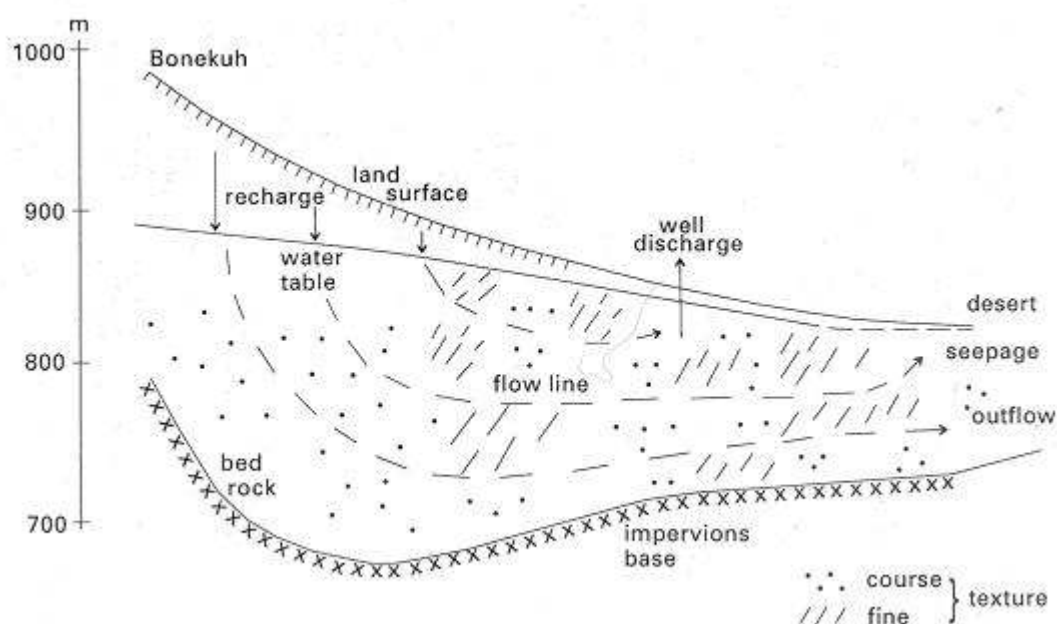


Figure 3. Cross-section schematically showing aquifer conditions of the Garmsar alluvial fan

Although the transmissivity of the aquifers in the lower parts is small compared to that in the upper parts of the alluvial fan, the relatively steeper gradients indicate that the difference of amounts of groundwater flow is not great. However, the rapid installation of deep tube-wells in the last decades may have had a profound influence on the groundwater flow, but the influence is not exactly known.

### Water quality

The water of the Hableh Rud at BoneKuh has a salinity of about 1 g/l or an electric conductivity (EC) of 1.7 dS/m. This signifies a medium quality for irrigation. In the major part of the alluvial fan, the natural drainage to the underground is high. Hence, enough leaching can take place to avoid soil salinity problems.

Occasionally the river produces “red floods”, when the water is sediment laden and highly saline (EC > 10 dS/m). The floods are the result of rain-showers in the lower parts of the Alburz mountains, where saline marls dominate.

The major part (90%) of the salts consists of chlorides and sulfates. Sodium salts (60%) are slightly in excess of calcium and magnesium (40%). The residual sodium carbonate content is low, hence the water is not giving serious alkalinity problems.

The salinity of the groundwater is very similar to that of the surface water, except that the total salt concentration is about double that of the river water. With sufficient leaching, the groundwater can be confidently used for irrigation. The aquifer itself is also continuously subject to flushing, as a part of the groundwater proceeds permanently to the Dasht-e-Kavir desert. Therefore, deterioration of the groundwater quality does not occur.

## **Irrigation/drainage**

Of old, irrigation was performed by tapping water from the numerous branches of the Hableh Rud River fanning out over the area. The water was led from here into earthen irrigation canals. Shallow pumped wells were used to supplement the surface water, especially in summer and in periods of drought. Towards the fringes of the alluvial fan at least 30 ghanats (artificial underground galleries) were dug to abstract water from the aquifer by gravity.

In the mid-eighties, a new irrigation system was constructed and in 1990 it was put into operation. The main purpose of the system was to reduce the deep percolation losses from the many natural watercourses (Figure 2).

The new system consists of lined canals and is characterized by a ring or belt canal, running through the middle of the fan along a circular layout perpendicular to the down-sloping original watercourses. This has drastically changed the distribution system of irrigation water.

In addition, more than 400 deep tube-wells have replaced the shallow wells and ghanats.

In the fringe-lands below the area brought under the new irrigation system, irrigation is occasionally practiced by farmers-groups who avail of the excess waters from the new irrigation system, if any, and the flood waters in the natural watercourses next to pumped tube-well water.

In the area brought under the new irrigation system, drainage systems are not required. There are no problems of water-logging. Occasional river-floods are easily routed through the natural watercourses. Additional subsurface drainage is not needed, as the natural underground drainage capacity of the aquifer is ample. The recently established tube-wells have further increased the discharge of groundwater.

Drainage system can be found occasionally in the lower parts of the fan to combat problems of shallow water-tables and water-logging in the wet periods when the Hableh Rud brings relatively large quantities of water consecutively during a number of years. Then, the recharge of the aquifer in the irrigated area increases and the groundwater abstraction decreases so that the water-tables may rise. Such periods do not occur regularly.

The drainage systems in the lower parts consist of open ditch-drains and have been installed through contractors and with Agricultural Bank loans.

## **Cropping patterns**

In Table 1 and 2 an attempt is made to summarize the cropping sequences and maximum crop evaporation during the agricultural year 1998/1999.

Roughly the cropped area occupies 30% of the land each season, while 70% is left fallow. The winter crops are mainly wheat and barley, while the summer crops are cotton and melons.

In June the winter crops are harvested and in May the summer crops are planted. These two months constitute a period of overlap and consequently the fallow land is about 40%.

Over the years, the fallow land is fully rotated with the cropped land.

**YEARLY CROPPED AREA AND CONSUMPTIVE USE IN GARMSAR**

crop	ha.	season evap m3/ha	total evap MCM	length season days	mean daily evap mm	from month	to month
melon	5262	6630	34.89	180	3.68	May	Oct
cotton	5173	9240	47.80	180	5.13	May	Oct
wheat	8440	5015	42.33	240	2.09	Nov	Jun
barley	5612	4513	25.33	240	1.88	Nov	Jun
trees	1168	7250	8.47	360	2.01	Jan	Dec
alfalfa	191	15086	2.88	360	4.19	Jan	Dec
<b>TOTAL</b>	<b>25846</b>		<b>161.69</b>				

Table 1

**MONTHLY CROPPED AREA AND CONSUMPTIVE USE IN GARMSAR**  
(1 : cropped, 0 : no crop)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
melon	0	0	0	0	1	1	1	1	1	1	0	0
cotton	0	0	0	0	1	1	1	1	1	1	0	0
wheat	1	1	1	1	1	1	0	0	0	0	1	1
barley	1	1	1	1	1	1	0	0	0	0	1	1
trees	1	1	1	1	1	1	1	1	1	1	1	1
alfalfa	1	1	1	1	1	1	1	1	1	1	1	1
evap MCM	9.40	9.40	9.40	9.40	23.18	23.18	14.73	14.73	14.73	14.73	9.40	9.40
crop area	15411	15411	15411	15411	25846	25846	11794	11794	11794	11794	15411	15411
evap mm/d	1.83	1.83	1.83	1.83	2.69	2.69	3.75	3.75	3.75	3.75	1.83	1.83
monthly/yearly cropped area (%) :	59.6	59.6	59.6	59.6	100.0	100.0	45.6	45.6	45.6	45.6	59.6	59.6
monthly cropped/irrigable area (%) :	38.5	38.5	38.5	38.5	64.6	64.6	29.5	29.5	29.5	29.5	38.5	38.5

Note: The monthly evaporation is calculated from the mean daily crop evaporations per season weighted for crop area. Hence, for each crop, correction is required to account for monthly variations

Table 2

## Distribution of irrigation water

At present, the distribution of surface irrigation water to the villages is determined by the Garmsar water Authority on the basis of water-rights and verbal agreements and communications with the water users in the absence of a written manual. The authority also maintains the irrigation canals and structures. The structures are sometimes re-designed to adjust to verbally communicated needs.

The water-rights are expressed in *sang*, a measure of continuous flow of about 10 l/s, but in practice it varies from 10 to more than 15 l/s. The water is delivered to about 100 tertiary units (often a village), within which the water is distributed by 12-day rotations amongst the farmers who each are entitled to receive the authorized *sangs* for a fixed number of hours during each rotation period. The village communities are, at the same, time water-user associations who take care of the water-distribution within the tertiary unit and they maintain the tertiary canals.

The deep tube-wells are privately owned. The drilling of wells is subject to license. Recently, the licensing has stopped for fear of over-exploitation of the aquifer. It appears that no operational rules are applied to the wells.

The drainage canals at the fringes of the irrigation perimeter are supposed to be maintained by the respective farmers groups.

## Water balances

As the annual rainfall is very small (on average only some 120 mm), the Hableh Rud is the main source of water in the Garmsar area. It brings on average some 275 MCM per year. The river water is mainly used for irrigation (on average possible some 210 MCM per year). The irrigation water is partly consumed by the crops or evaporated and partly it recharges the aquifer. Another portion of water given to the aquifer is by means of infiltration basins (on average some 15 MCM per year). The remainder (about 50 MCM per year) leaves the Garmsar area through the flood-ways to the lower lying desert region.

The yearly average recharge to the aquifer by deep percolation losses from the surface irrigation, at an overall irrigation efficiency of 40%, will be roughly 120 MCM. It is estimated that the average annual pumping rate from wells is about 175 MCM. A small fraction of the pumped water (say 15 MCM) is used for domestic and industrial purposes. The remainder (160 MCM) serves the irrigation of agricultural lands. But again, due to the low irrigation efficiency, about 90 MCM returns to the aquifer to be either lost as groundwater outflow to the desert or pumped up again.

Irrigations from surface and groundwater together satisfy the consumptive use of the agricultural crops (plus the direct evaporation from the land) to the tune of 160 MCM/year, (90 from surface water and 70 from groundwater).

The annual net recharge to the aquifer (60 MCM, consisting of 120 MCM deep percolation losses from surface irrigation, 90 MCM deep percolation losses of pumped well water, 15 MCM from infiltration basins, minus 175 MCM pumping from wells) will be either stored to raise the groundwater level or discharged as underground flow into the desert.

Figure 4a and 4b show a general picture of the annual water balance of the Garmsar plain. The figure is crude and it is recommended that it is verified and updated each year so that proper water-balance records will be obtained.



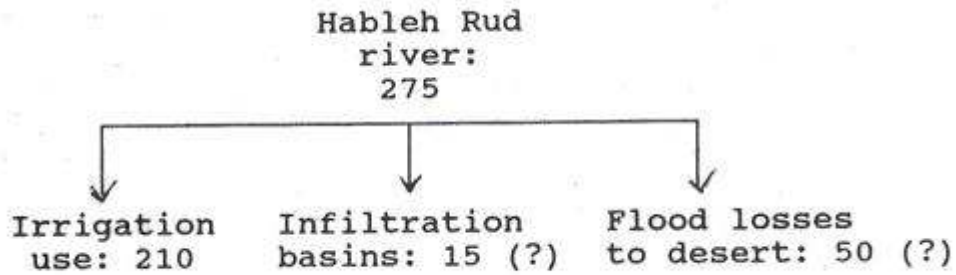


Figure 4a Surface water balances, estimated annual average in MCM

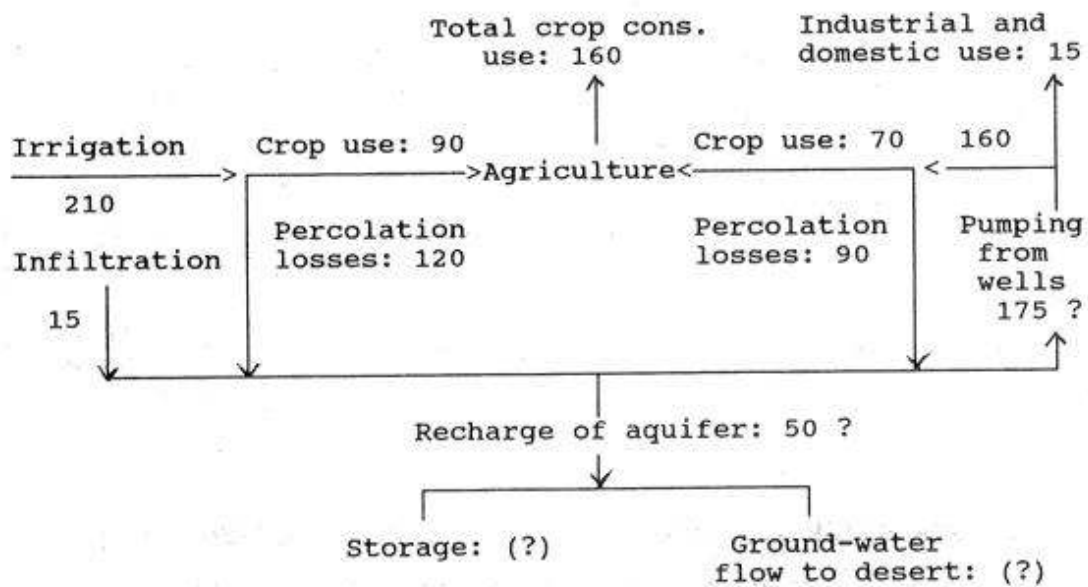


Figure 4b Irrigation and groundwater balances, estimated annual average in MCM

The continuous recirculation of the groundwater complicates the determination of the annual water balance. It is recommended that a combined irrigation cum groundwater model (like SahysMod) is applied to solve this problem. At the same time the model can be used to estimate the underground losses to the desert. The losses could be intercepted by deep wells and used to irrigate the fringe-lands below the Garmzar irrigation scheme. However, a certain quantity of outflow must be maintained to prevent undue salinization of the groundwater.

### *Discharge statistics of Hableh Rud*

A cumulative frequency distribution of the average annual discharge of the Hableh Rud at BoneKuh in terms of  $m^3/s$  has been prepared with the CumFreq program. The results are shown in Figure 5.

It is recommended that the frequency distributions are also made in terms of MCM per month.

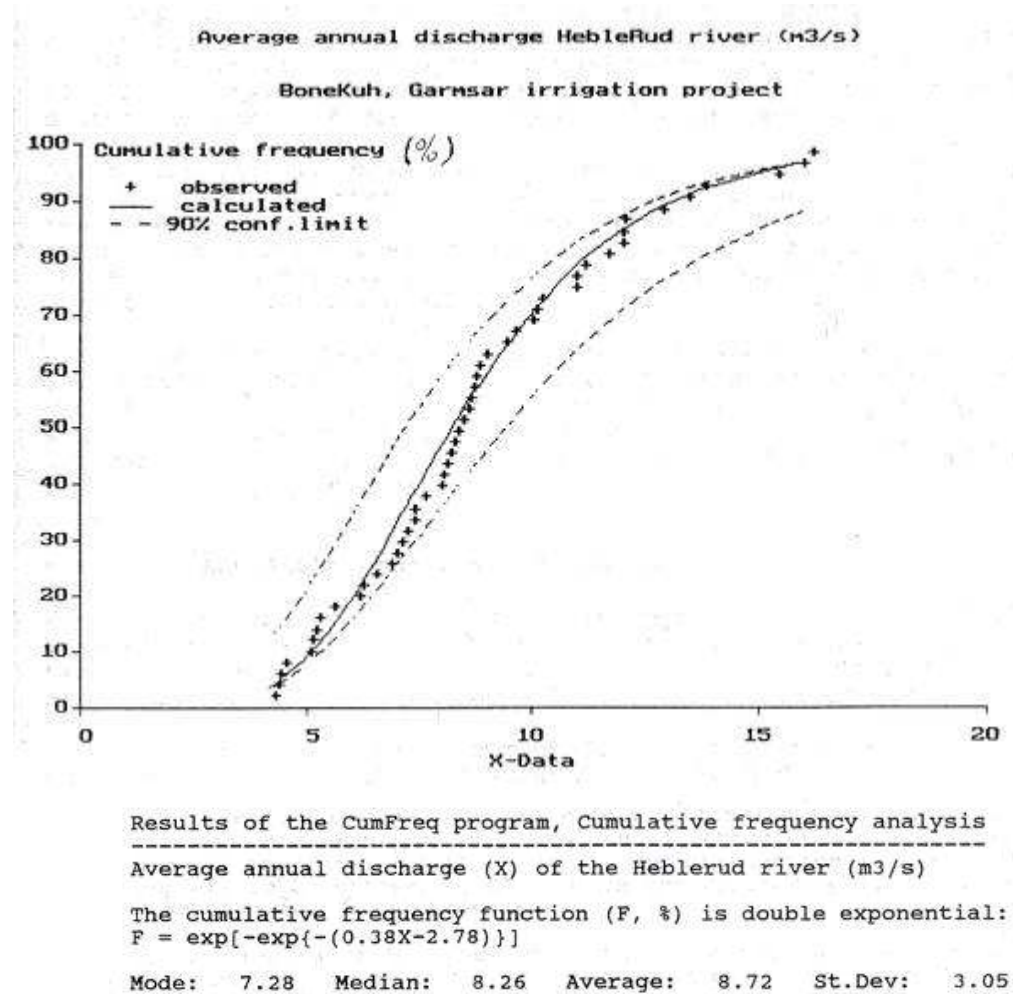


Figure 5. Cumulative frequency curve of Hableh Rud discharge at BoneKuh

## Soil Salinity

### *General*

Soil salinity and alkalinity problems are reported to occur in the lower lying fringe-lands of the irrigation scheme. These fringes are used for agriculture, mainly by *moshaa* groups, to whom the land were given free of charge. In the fringes one encounters an irregular mixture of cultivated lands, temporary fallow lands and unused lands. There is a scarcity of water, as the lands are outside the irrigation scheme proper. The *moshaa* groups use excess water from the irrigation scheme supplemented by groundwater.

The water scarcity is the main cause of the inability to reclaim the major part of the saline soils. However, within the cultivated lands, the *moshaa* groups appear to provide sufficient water, over an above the amount of water required for crop consumptive use, so that the are regularly leached and have acceptable soil salinities.

To cope with the leaching water, some form of land drainage must be present. This can be natural and/or artificial subsurface drainage. This will be discussed further below.

### *Soil salinity, sodicity, and alkalinity classification*

The classification of soil salinity, sodicity, and alkalinity is based on the criteria published in the Handbook 60 of the USA Salinity Laboratory, 1960. Since then the insight into sodicity and alkalinity have undergone a change, as reported in the FAO Soils Bulletin authored by Yadav and Abrol.

When the sodicity/alkalinity is caused by sodium salts, and mainly sodium chloride, as is the case in Garmsar, a separate alkalinity classification is not required and it suffices to classify the soils according to the salinity status only. The reason is that saline soils are also sodic, but upon reclamation by leaching, they are usually converted into normal non-saline soils, without sodicity and alkalinity problems. Hence the dispersion problems of the soil's clay particles due to alkalinity will probably not occur and dangerous loss of soil structure need not be feared. The latter problems usually arise exclusively when the soils are sodic and non- saline while the sodicity is owing to the presence of sodium carbonates, which leads to immobilization of calcium, that precipitates as lime, as well as to the formation of sodium-hydroxide giving high pH values (pH > 9). Fortunately, the pH values of the soils in Garmsar are less than 8.5

The fact that many soils in Garmsar are rich in calcium (the soils contain up to 30% of lime) and that the surface and ground waters contain appreciable amounts of calcium sulfate (gypsum) also help to control the sodicity/alkalinity problems, if any. The results of the hydraulic conductivity measurements, done in these soils by Abvarzan Co. , support this conclusion as will be explained later.

It is concluded that the sodicity problems of the soils in the lower parts of the Garmsar area should rather be considered as salinity than alkalinity problems. The reclamation of these soils can be done using simple leaching techniques without applying chemical amendments and /or special reclamation crops. As the soils undoubtedly also contain gypsum (the quantity is to be verified), the leaching process will be further enhanced.

### ***Present use of saline soils***

During the field visits it became apparent that the farmers are able to bring about a good crop production in the saline fringes of the Garmsar area. It can be concluded that the soils have a good production capacity and that the farmers are able to control the salinity problems to some extent. The main problem appears to be scarcity of irrigation water, which prevents all of the land to be taken into cultivation.

It is advisable to carry out regular soil surveys twice a year (e.g. in March and October) if farmers' fields to judge the severity and extent of the salt problems. It will not be required to carry out such a survey in the unused lands as these are not subject to leaching so that they will be quite saline anyway, and this salinity is irrelevant because the unused lands cannot be taken into cultivation due to the water scarcity. Many of the existing data on soil salinity were obtained through standard soil surveys including the un-farmed wastelands. Therefore, the data are representative for the farm-land problems and the probably give an un-representative picture of the situation.

If, owing to an increase of water resources, more land can be brought under irrigated agriculture, the presently uncultivated saline lands can probably be reclaimed fairly easily. This can be appreciated from the fact that the lands that are actually cultivated have minor or no salinity problems.

It is recommended to acquire EM38 electro-magnetic apparatus for the rapid survey of soil salinity over the entire depth of the root zone.

It is also advisable to apply a combined groundwater and agro-hydro-salinity model like SahysMod to predict the salinity development under irrigated conditions and to assess the amount of groundwater available for additional irrigation in the fringe lands by intercepting it through deep wells. It can then be verified how much groundwater reaches the low lying desert areas where it will eventually evaporate and it will be lost for agricultural production.


The possible application of SahysMod is further discussed later.

### ***Salinity control and future use of saline soils***

In irrigated arid zones with insufficient natural or artificial underground drainage, it is the experience worldwide that no more than 20 to 30% of the irrigated land eventually becomes salty. The salty land is abandoned. As the abandoned parts of the area no longer receive irrigation water, the water tables in these parts will drop and attract groundwater from the neighboring irrigated fields. Thus, the un-irrigated parts function as drainage sinks, permitting leaching of the cultivated parts and collecting

the excess salts. If sufficient irrigation water is available, 70 to 80% can be preserved in good condition. When the land is undulating, especially the lower lying stretches and/or the depressions are subject to salinization. In Australia, the designation of certain parts of the area as sinks is called “sacrificial drainage”.

In the fringe lands of the Garmsar irrigation project water is scarce. Therefore, it would seem a good practice to reserve a part of the area for salt accumulation. This can be achieved by the method of “strip cropping”. In soils with good hydraulic permeability underlain by aquifers with good transmissivity, the cropping can be done in strips of land say 100 m wide separated by permanently uncultivated strips of say 30m wide. When the transmissivity is lower, the cropped strips may be taken narrower e.g. 50 m, with uncultivated strip.

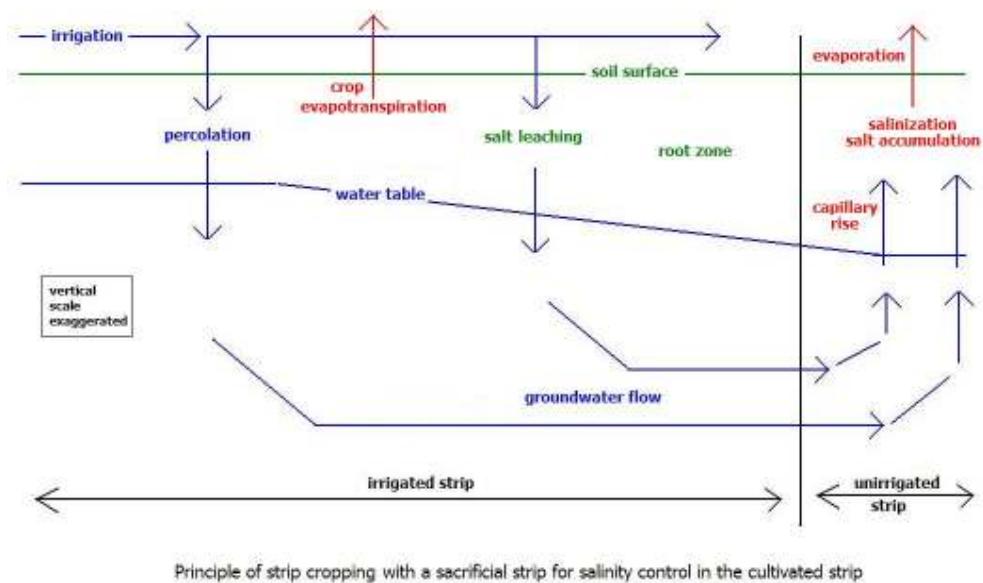

The uncultivated strips can be put to good use by planting them to salt resistant trees or shrubs (e.g. casuarina, eucalyptus, artiplex) that can tap the groundwater. Additionally, the uncultivated strips can be provided with an open drain to control the water table in periods of water-logging with high water-tables.

The proposed system can also be practiced in the pilot areas that are planned to be installed by the government in farmers’ fields with farmer participation. The pilot areas need an intensive monitoring system and the use of an agro-hydro-salinity model like SaltMod can be instrumental in this. This model has been made available to Abvarzan Co.

A more precise determination of the width of the cultivated and uncultivated strips can be done using the computer model EnDrain, which permits the calculation of the shape of the water table in cultivated land in the presence of wide open drains of varying width, depth and spacing. In the case of strip cropping, the width of the open drains should correspond to the width of the uncultivated strips and the spacing should correspond to the width of the cultivated strips.

Alternatively, a combined groundwater and agro-hydro-salinity model such as SahysMod can also be used for the purpose. The model takes into account the capillary rise from the uncultivated strips.

## Hydraulic conductivity

Abvarzan Co. has been hundreds of measurements of the soil's hydraulic conductivity in the fringe lands of the Garmsar irrigation scheme. The majority of the measurements were made at about 2 m depth. As the water table was mostly deeper than 2 m, the Porchet infiltration method (also called inversed auger-hole method) was used for measurements above the water table.

Given the geo-hydrological buildup of the area, it is unlikely that flow-impeding soil layers are found within 10 m depth.

Figure 6 shows the cumulative frequency distribution of the first 50 measurements (up to hole H58) according to the Porchet method excluding 5 measurements with hydraulic conductivity values greater than 5 m/day. The figure was made with the CumFreq computer program made available to Abvarzan Co. The figure shows that the soil's hydraulic conductivity, with an average of 1 m/day, is fairly high. This confirms that soil alkalinity problems, and the associated soil structure decline, are not present and that the soils are well drainable. Nevertheless, there is a large variation in results.

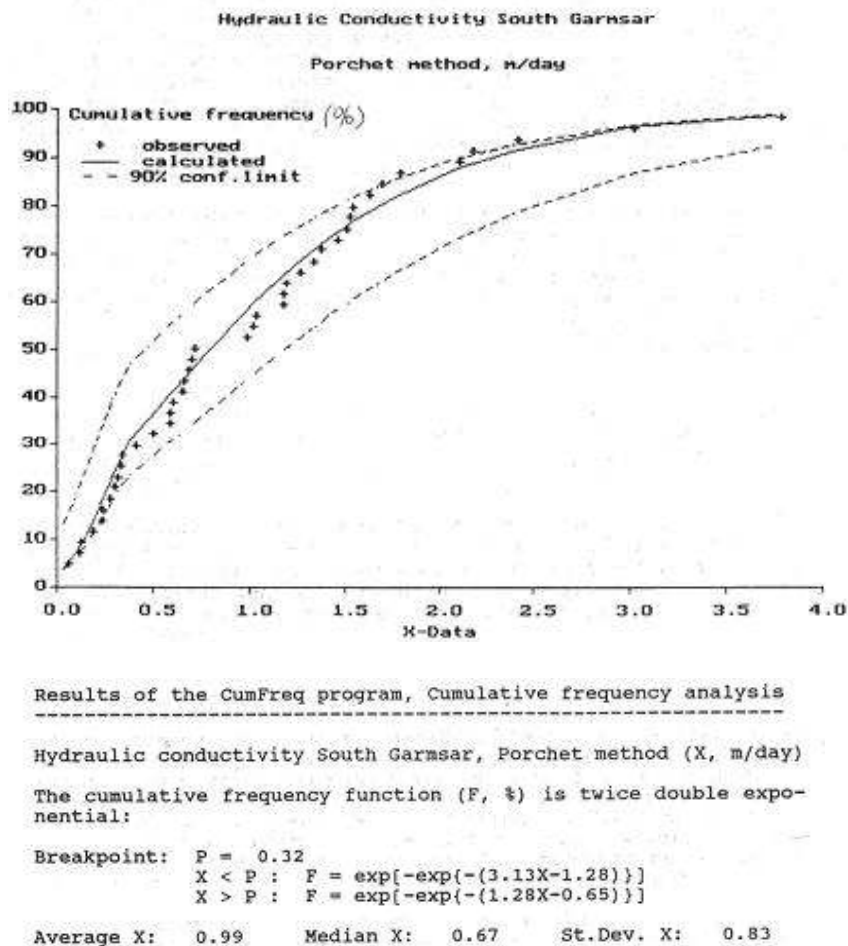


Figure 6. Cumulative frequency distribution of hydraulic conductivity

It is recommended to repeat the analysis with CumFreq for the remaining observations on hydraulic conductivity. It can also be seen whether there is a

systematic difference between hydraulic conductivities of the southwestern, the southern, and the southeastern fringe lands. Further it can be analyzed whether the Porchet method and the Hooghoudt auger-hole method, for measurements below the water table, give significant differences.

### **Land drainage systems**

(To be completed)

### **Additional irrigation from deep wells**

(To be completed)

## **2. Recommendations**

(To be completed)